
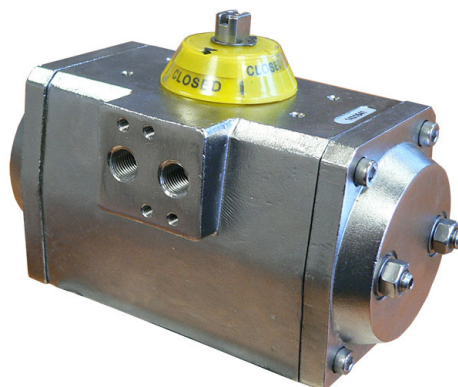


Pneumatikantrieb · Pneumatic Actuator
Edelstahl · Stainless Steel

PD-S/PE-S

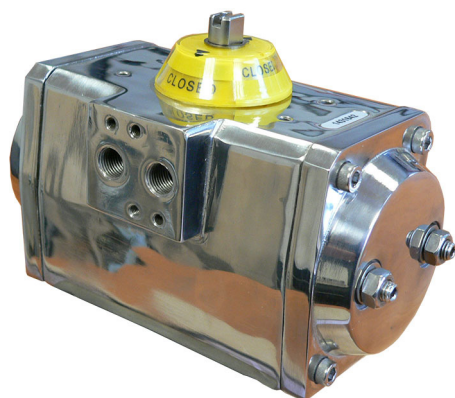

Drehmomente [Nm]
 Torque [Nm]

PD-S Doppelt wirkende Antriebe
 PD-S Double acting actuators

PE-S Einfach wirkende Antriebe
 PE-S Single acting actuators

Siehe Tabelle PD/PE
 See table PD/PE

Typen 05 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 55 / 65

Typ Type	Luftverbrauch [Liter] Air consumption [liter]		Gewicht [kg] Weight [kg]	
	PD-S	PE-S	PD-S	PE-S
05	0,22	0,13	1,90	2,00
15	0,41	0,18	3,60	3,80
20	0,71	0,29	4,50	4,90
25	1,10	0,48	7,10	7,60
30	1,40	0,65	8,40	9,15
35	2,45	1,20	13,50	15,00
40	3,05	1,65	13,20	14,70
45	4,40	1,85	27,00	29,60
55	9,00	4,10	32,50	37,30
65	16,60	7,10	40,00	49,60

