




## In line gauge isolators with lateral 1/2" port for inspection

### FT 01.290

In line gauge isolator for manometer, connection M-F with 1/2" lateral port with threaded cap

**In line needle valves, with 1/2" lateral port and handwheel**

**Carbon steel**

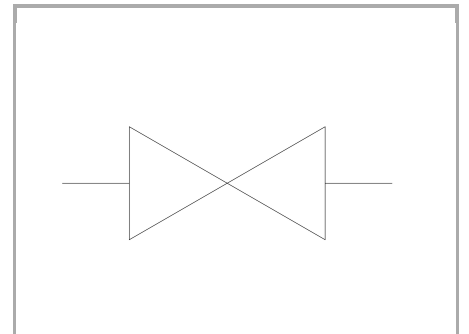

## Technical information

### Technical description

They are generally used for hydraulic elevators subjected to initial and periodical tests by the institution in charge. They are normally used to protect the manometer as they have the double function of dampening pressure shock, when opening, and of isolating it from pressure line. Moulded in high-resistance steel, protected by an accurate treatment, subjected to strict tests, they ensure reliability and long life. A rotating swivel nut allows the user to plug the manometer, directing it to the more suitable position, with a single blocking position. The sealing, supplied as standard, and inserted in the nut, prevents any leakages between the connection and the gauge. For pressure gauge with taper threads, it will be necessary to use copper washers FT 1201 (to be requested separately). Suitable for pressure up to 400 bar and temperature from -20° to +100° they can be panel mounted by use of panel nut (G), supplied on request.

### Materials

<b>CORPO VALVOLA / VALVE BODY</b>	<b>Acciaio/Steel 11 S Mn Pb 37-UNI EN 10087</b>
<b>SPILLO / NEEDLE</b>	<b>Acciaio/Steel 35 S Mn Pb 10-UNI EN 10087</b>
<b>GUARNIZIONI / GASKETS</b>	<b>Di serie NBR - A richiesta FPM / Standard NBR-on demand FPM</b>
<b>ANELLI ANTIESTRUSIONE / ANTI-EXTRUSION RING</b>	<b>PTFE</b>
<b>MANOPOLA TIPO MP / KNOB TYPE MP</b>	<b>NYLON 66</b>



## Dimensional tables and drawings

TIPO / TYPE	A1 UNI 338	A2 UNI 339	B	$\varnothing C$	D	E	$\varnothing F$
14	1/4" G	1/4" Gc	12	5,6	20,5	62	34

TIPO / TYPE	G	$\varnothing H$	L	M	N	P	$\varnothing Q$
14	12	M15x1	53	15	2	9,5	25

TIPO / TYPE	$\varnothing R$	S	T	OR	Es.	PESO / WEIGHT KG
14	1/2" G	32	33,5	2018	18	0,195

